

50Hz

iT1900 Ice Cube Machine

Indigo® NXT™ iT1900 Ice Cube Machine

Models

- IRT1900A
 IDT-1900A
 IYT1900A
 IDT1900N



Indigo NXT Series iT1900 Ice Machine on D970 Bin
*Ice machine and bin sold separately

Designed for operators who know that ice is critical to their business, the Indigo NXT Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanability and programmability make your ice machine easy to own and less expensive to operate.

- **New levels of Performance** - Showcasing an average of 13% lower energy consumption and a 10% reduction in potable water usage. This translates into lower cost of ownership over the life of your machine.
- **easyTouch® Display** - New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Multiple Language Capability** - The easyTouch display is available in multiple languages selected in the initial start-up installation Wizard.
- **Programmable Ice Production** - Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** - Easy Access front door panel. Removable water-trough, distribution tube, curtain, and sensing probes for fast and efficient cleaning. Select components made with AlphaSan® antimicrobial.
- **Intelligent Diagnostics** - Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** - Unique patented technology allows for reliable operation in challenging water conditions and environments
- Available **LuminIce® II Virus and Bacteria Inhibitor** - Controls viruses, bacteria, mold and yeast within the food zone to keep the ice machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** - Insures consistent ice harvest in all environmental conditions. This software solution works in conjunction with the acoustical ice sensing probe improving reliability and performance.

Ice Machine Electric

230/ 50/1

Minimum circuit ampacity:

Air-cooled: 16.5 *1ph*
Remote-cooled: 15.8 *1ph*

Maximum fuse size:

Air-cooled: 25 *1ph*
Remote-cooled: 25 *1ph*



Specifications

Operating Limits:

- Ambient Temperature Range: 40° to 110° F (4.4° to 43.3° C)
Water Temperature Range: 40° to 90° F (4.4° to 32.2° C)
- Water Pressure Ice Maker Water In:
Min. 20 psi (137.9 kPA)
Max. 80 psi (551.1 kPA)

BTU Per Hour:

26,100 (average),
and 30,500 (peak)

Refrigerant:

R-410 CFC-free

Ice Shape



Half Dice
3/8" x 1 1/8" x 7/8"
(.95 x 2.86 x 2.22 cm)
Cube weight 5.7 g



Dice
7/8" x 7/8" x 7/8"
(2.22 x 2.22 x 2.22 cm)
Cube weight 8.5 g



Regular
1 1/8" x 1 1/8" x 7/8"
(2.86 x 2.86 x 2.22 cm)
Cube weight 14.2 g






50Hz

Indigo® NXT™ iT1900 Ice Cube Machine

iT1900 on D970 Storage Bin

- Ⓐ Electrical Entrance (2) Options
- Ⓑ 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- Ⓒ 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- Ⓓ 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- Ⓔ 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- Ⓕ 1/2" (1.27 cm) Auxillary Base Drain Socket
- Ⓖ 3/4" (1.91 cm) Bin Drain

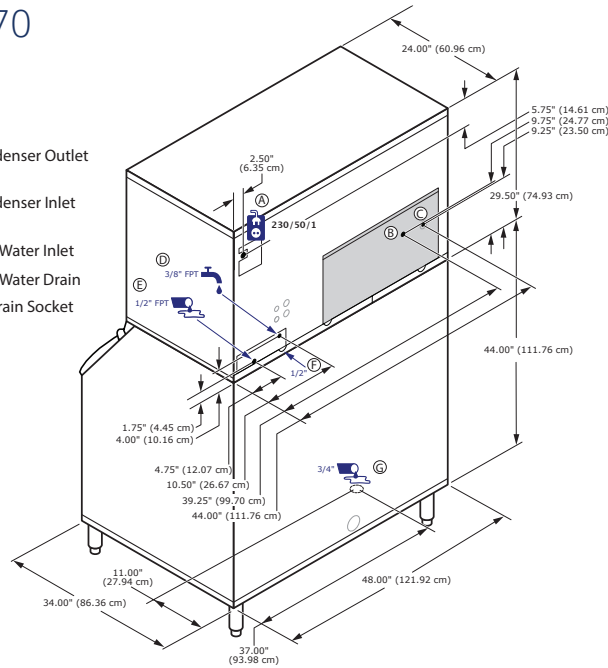

Installation Note

Air Cooled clearance:

Top: 24" (61.0 cm)
Sides: 24" (61.0 cm)
Back: 5" (30.5 cm)

Water Cooled clearance:

Top/Sides: 8" (20.3 cm)
Back: 5" (12.7 cm)

Space-Saving Design



| | iT1900 D970 |
|-------------|---------------------|
| Height | 79.50" 201.90 cm |
| Width | 48.00" 121.92 cm |
| Depth | 34.00" 86.30 cm |
| Bin Storage | 882 lbs 400 kgs |

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Application capacity measured 90% for the total volume in Cu.ft x 33 lbs/ft³

Specifications

| | Model | Ice Shape | Ice Production 24 Hours | | Power Usage kWh 45.4 kg / 100 lbs @ 32° Air / 21° C Water 90° Air/70°F Water | Potable Water Usage/100 lbs. 45.4 kgs. of Ice |
|---------------|-----------|------------|--|--|---|---|
| | | | 21° Air / 10° C Water 70° Air/ 50°F Water | 32° Air / 21° C Water 90° Air/ 70°F Water | | |
| AIR-COOLED | IRT1900A | regular | 1,700 lbs. | 1,275 lbs. | 1 Ph | 20 Gal. |
| | | | 771 kgs | 578 kgs | | |
| | IDT1900A | dice | 1,805 lbs. | 1,384 lbs. | 4.47 | 20 Gal. |
| | | | 819 kgs | 628 kgs | | |
| IYT1900A | half-dice | 1,805 lbs. | 1,430 lbs. | 4.32 | 20 Gal. | |
| | | 819 kgs | 649 kgs | | | |
| REMOTE-COOLED | IDT1900N | dice | 1,755 lbs. | 1,523 lbs. | 3.91 | 20 Gal. |
| | | | 796 kgs | 691 kgs | | 75.7 L |

Order separately: Ice storage bin for all units, line-set and remote condenser unit JCT1500 for remote cooled units.
This product is hermetically sealed and contains fluorinated greenhouse gas R410A

Accessories

LuminIce® II Virus and Bacteria Inhibitor

controls viruses and bacteria in the ice machine.



External Scoop holder

protect the ice scoop with the NSF approved versatile scoop holder.



Arctic Pure® Plus Water Filters

reduce sediments and chlorine contaminants down to .5 microns. Use with a Pre-filter is recommended.



Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.